


External Dimensions (mm)

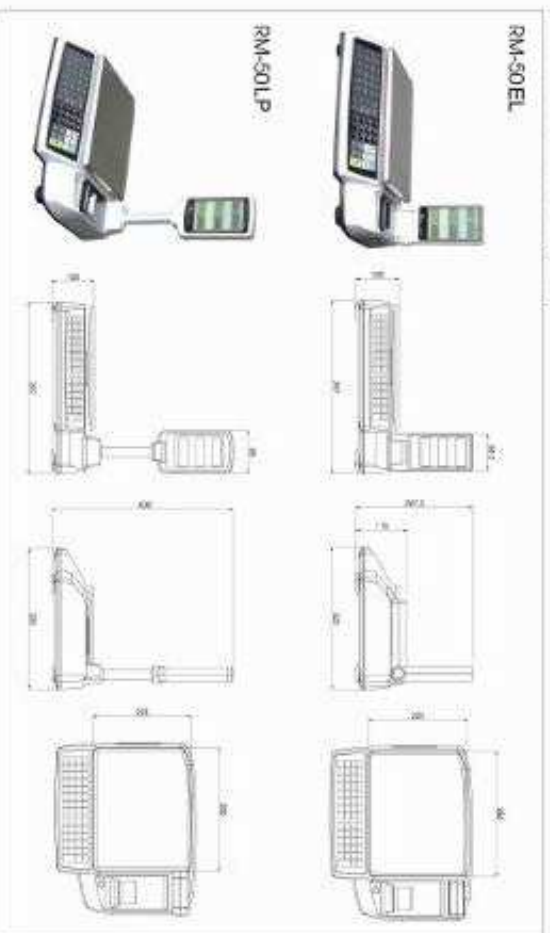

Basic Specifications

Capacity	Single Tare Out Type 1 / 3,000	Max 3kg e=1g	Max 6kg e=2g	Max 12kg e=2g	Max 15kg / 30lb e=5g / 0.01 lb	Max 30kg e=10g
	Multi Interval Type 1 / 3,000	Max 3 / 6 kg e = 1 / 2 g	Max 6 / 15 kg e = 2 / 5 g	Max 15 / 30 kg e = 5 / 10 g		
Model		RM-50	RM-50EL	RM-50LP		
Display		16 segments LCD w/ 23 digit height	16 segments LCD w/ 27 segments (backlight)	16 segments LCD w/ 27 segments (backlight)		
Number of Preset Keys			24	24		
Printer Resolution			1 / 3,000	1 / 3,000		
Paper Width			48 mm	48 mm		
Printing Speed			Max 70 mm / sec	Max 70 mm / sec		
Power Source			AC 100 / 117 / 220 / 230 / 240 Volts (±10%, ±5%) Rechargeable battery (Option, DC 12 Volt, SANI)	AC 100 / 117 / 220 / 230 / 240 Volts (±10%, ±5%) Rechargeable battery (Option, DC 12 Volt, SANI)		*See Foot Note
Operating Temperature			-10 °C to +40 °C	-10 °C to +40 °C		
Standard Interface			AC receptacle, Cash drawer control port (Drive voltage is 8 VDC), RS-232C, RS-485 interface	AC receptacle, Cash drawer control port (Drive voltage is 8 VDC), RS-232C, RS-485 interface		
Printer size			286 mm x 223 mm	286 mm x 223 mm		
Overall size			397 mm x 325 mm x 287.5 mm	397 mm x 325 mm x 430 mm		
Net Weight			5.2kg	5.4kg		

*Under normal conditions, 20°C. RM-50 can be operated with built-in battery charged for 8 hours for more than 70 hours without using keypad or 2 days using 200 receipts at 10 receipts per day.

*Under standard DBC, Class B or higher requirement. *Specifications are subject to change without notice.

SHANGHAI TERAKA ELECTRONIC CO. LTD.

1st Floor of #7 Building, Jie Yuan Business Center,
#61 Long Wu Road, Shanghai 200232, P.R. OF CHINA
TEL: +86-21-64928151
FAX: +86-21-64920088
URL: <http://www.og-scale.com>
E-MAIL: service@og-scale.com



RM-50 Series

Scale Receipt Printer

Weighing and receipt printing anywhere



Searching for
a New Balance

Variation: Long Pole & Backlight types